

CITY OF TOPEKA

DRAFT

SIDEWALK IMPROVEMENT PROJECT


NW Fillmore Street (from First Avenue north to Ward Meade Park)

Project No. T-241057.00

Special Conditions

GENERAL: This project is to add sidewalk on the west side of Fillmore Street starting at First Avenue and continuing north to Ward Meade Park – approximately 300 feet. There are not separate plan sheets.

The work is to be completed in the Spring of 2019. The work will be completed and ready for final acceptance/payment within 30 days from the Start Work Order. By submitting a bid for this project, the Contractor is making a commitment to meet this schedule. Under no circumstances shall there be any extensions granted unless agreed to by the City.

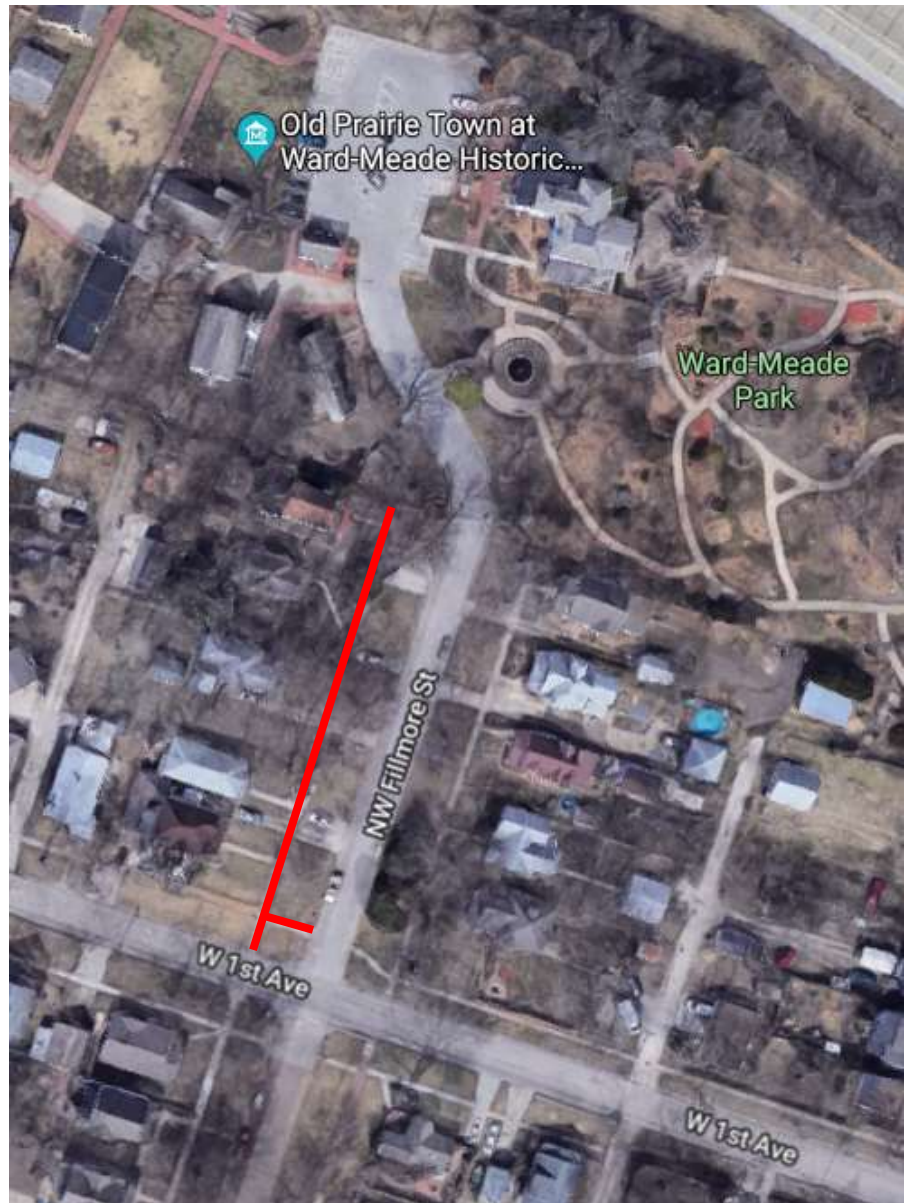


PROJECT DESCRIPTION: The project starts at First and Fillmore, the contractor will remove and replace two sidewalk ramps.



The contractor will continue north until the tree is reached – the sidewalk will curve to the east to avoid the tree.



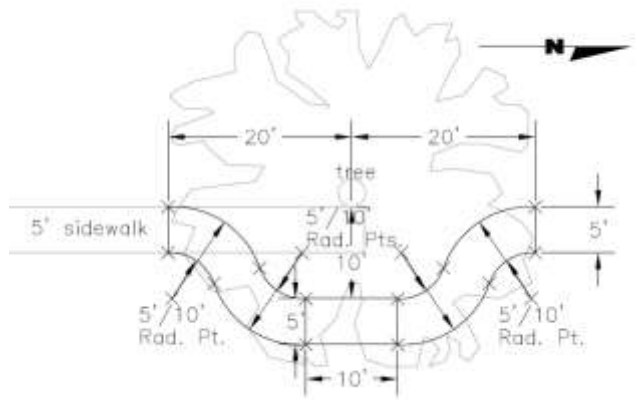

After the tree there is no sidewalk – continue north to match the existing location.



Remove and replace this section and continue north to the property line.



Stop sidewalk at the fence just west of the brick pillar. City staff will be available to help with any layout questions.

